

MicroPower Regulated Charge Pump

● Features

- Step-Up Voltage Converter
- Input Voltage Range: 2.5 to 5.0V
- Fixed 5V \pm 4% Output
- High Frequency 400kHz Operation
- Logic-Controlled Shutdown
- Short-Circuit/Over-Temperature Protection
- Lead (Pb) Free SOT23-6 Package

● Applications



- Cellular Phones
- Digital Cameras
- Handheld Electronics
- LED/Display Backlight Driver
- LEDs for Camera Flash Portable
- Communication Devices
- MP3 Players
- GPS Receivers
- PDAs

● General Description


The FS1310B is a MicroPower switched capacitor voltage converter that delivers a regulated output. No external inductor is required for operation. The FS1310B can deliver up to 150mA to the voltage regulated output. It features very low quiescent current and high efficiency over a large portion of its load range, making this device ideal for battery-powered applications. Furthermore, the combination of few external components and small package size keeps the total converter board area to a minimum in space-restricted applications.

The FS1310B uses a pulse skipping technique to provide a regulated output from a varying input supply. The FS1310B contains a thermal management circuit to protect the device under continuous output short-circuit conditions. The FS1310B has lead (Pb) free SOT23-6 package and is rated over the -40° C to +85° C temperature range.

● Pin Configurations

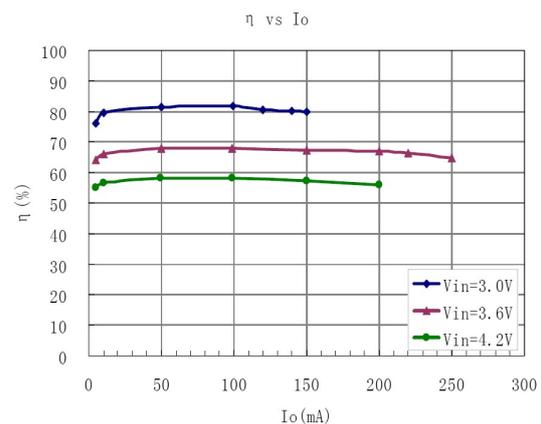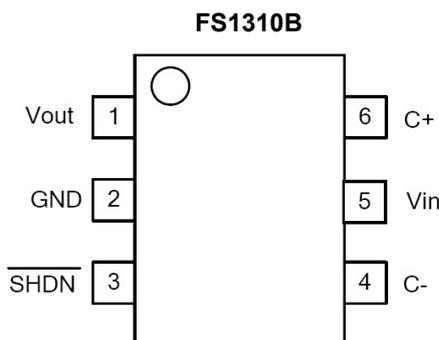

● Typical Application

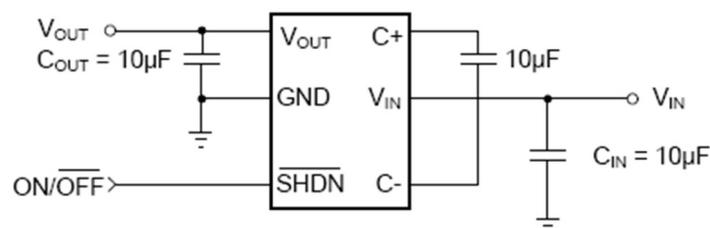

- **Absolute Maximum Ratings**

VIN to GND	-0.3V to 6V	Package Thermal Resistance	
Vout to GND	-0.3V to 6V	SOT23-6, θ_{JA}	250°C/W
SHDN to GND.....	-0.3V to 6V	Lead Temperature Range (Soldering 10 sec)	
Storage Temperature Range.....	-65°C to +150°C	260°C
Junction Temperature.....	160°C	ESD Susceptibility	
Operating Temperature Range	-40°C to +85°C	HBM.....	2000V
Power Dissipation, PD @ TA = 25°C		MM.....	400V
SOT23-6	0.34W		

NOTES:

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress Rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

- **Caution**

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. FORSEMI recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

- **Pin Description**

Name	Function
VOUT	Regulated output pin.
GND	Ground
SHDN	Shutdown input. Logic low signal disables the converter.
C-	Flying capacitor negative terminal.
VIN	Input supply pin.
C+	Flying capacitor positive terminal.

FS1310B

• Electrical Characteristics

(TA = -40°C to +85°C, unless otherwise noted. Typical values are at TA = 25°C, C_{FLY} = 10μF, C_{IN} = 10μF, C_{OUT} = 10μF).

Parameter	Symbol	Conditions	Min	Typ	Max	Units
FS1310B-5.0						
Input Voltage Range	V _{IN}	V _{OUT} = 5.0V	2.7		V _{OUT}	V
Output Voltage	V _{OUT}	2.7V < V _{IN} < 5V, I _{OUT} ≤ 50mA	4.7	5.0	5.2	V
		3.0V < V _{IN} < 5V, I _{OUT} ≤ 100mA	4.8	5.0	5.2	
Quiescent Power Supply Current	I _Q	2.7V < V _{IN} < 4.2V, I _{OUT} = 0mA, SHDN = V _{IN}		650	1500	μA
Shutdown Supply Current	I _{SHDN}	2.7V < V _{IN} < 3.6V, I _{OUT} = 0mA, V _{SHDN} = 0		0.3	1	μA
		3.6V < V _{IN} < 5V, I _{OUT} = 0mA, V _{SHDN} = 0			1	
Ripple Voltage	V _{RIPPLE}	V _{IN} = 2.7V, I _{OUT} = 50mA		15		mVP-P
		V _{IN} = 3V, I _{OUT} = 100mA		88		
Efficiency	η	V _{IN} = 2.7V, I _{OUT} = 50mA		91		%
Frequency	f _{OSC}	Oscillator Free Running		400		kHz
SHDN Input Threshold High	V _{IH}		1.4			V
SHDN Input Threshold Low	V _{IL}				0.4	
SHDN Input High Current	I _{IH}	SHDN = V _{IN}	-1		+1	μA
SHDN Input Low Current	I _{IL}	SHDN = GND	-1		+1	μA
Turn-On Time	T _{ON}	V _{IN} = 3V, I _{OUT} = 0mA		0.3		ms


Specifications subject to changes without notice.

FS1310B


- **Typical Performance Characteristics**

At $V_S = +5.0V$, $T_A = +25^\circ C$, $V_{IN} = 3V$, $C_{IN} = C_{OUT} = 10\mu F$, $C_{FLY} = 10\mu F$, unless otherwise noted.


Startup Time with 50mA Load

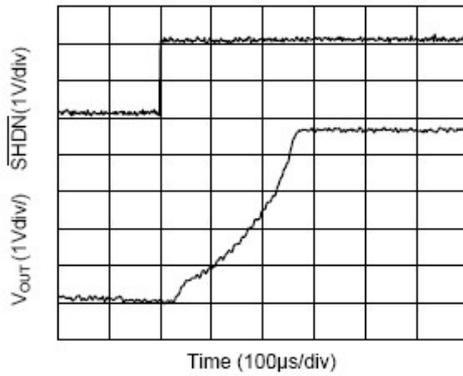


Startup Time with 100mA Load

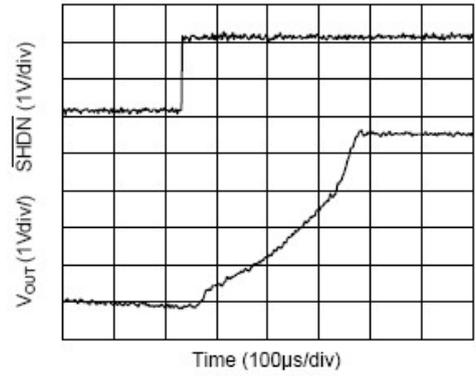


Output Ripple with $I_{OUT} = 50mA$

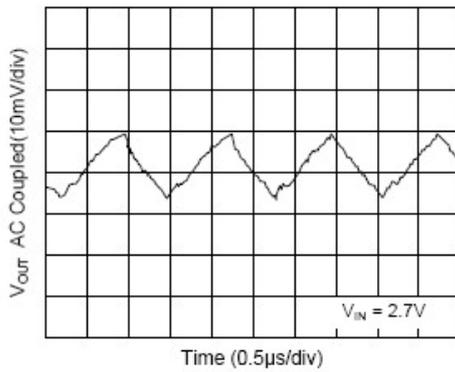


Output Ripple with $I_{OUT} = 100mA$

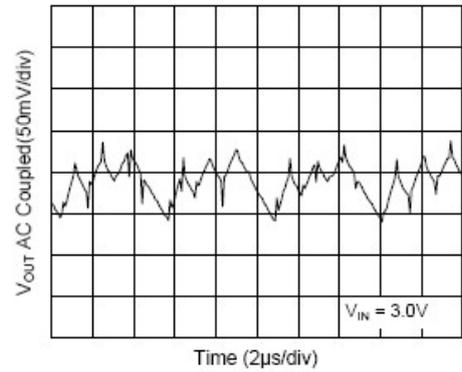







Load Transient Response for 50mA

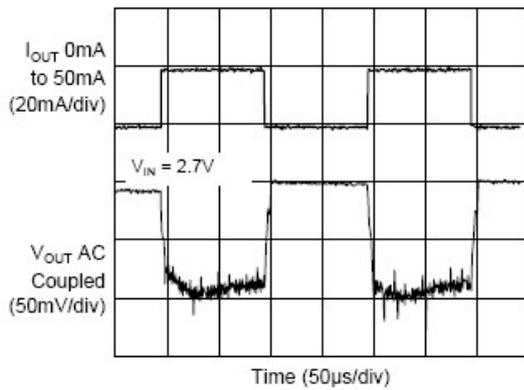




Load Transient Response for 100mA

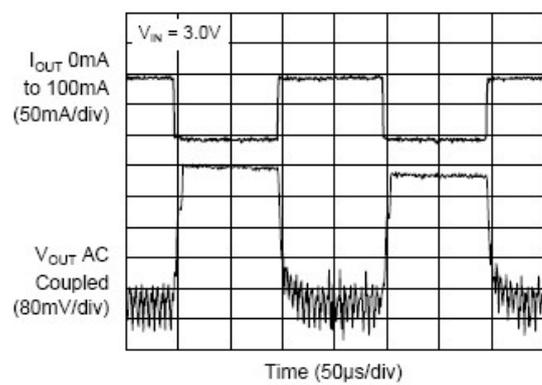

FS1310B

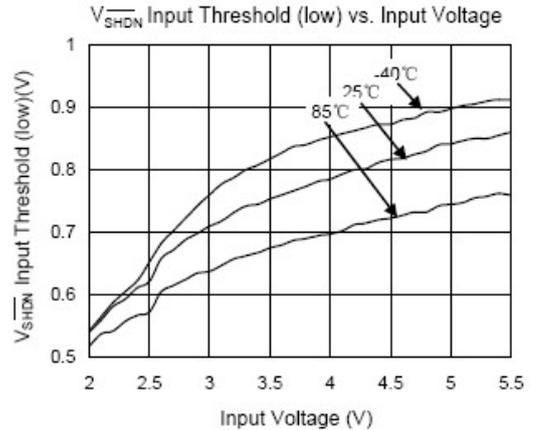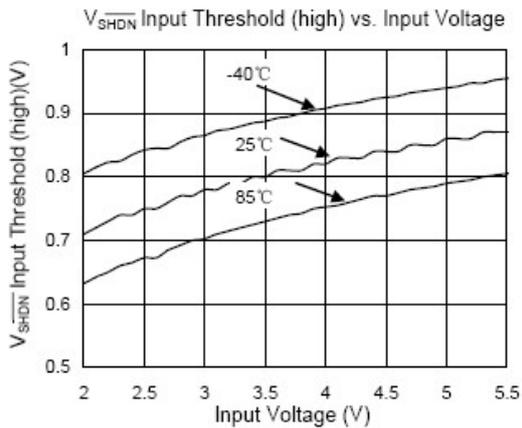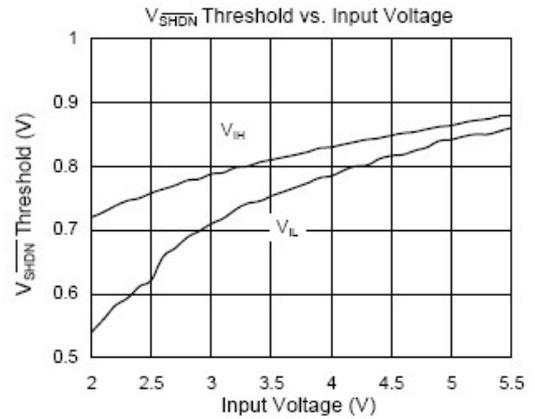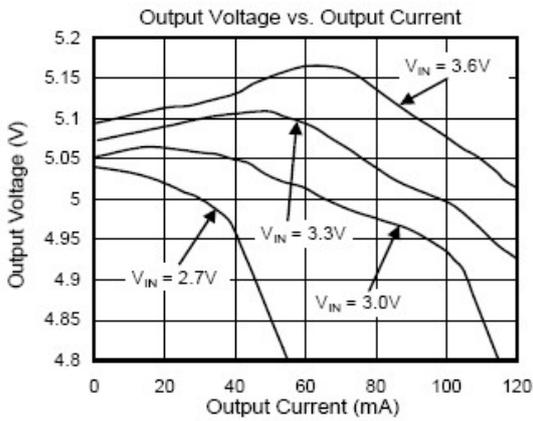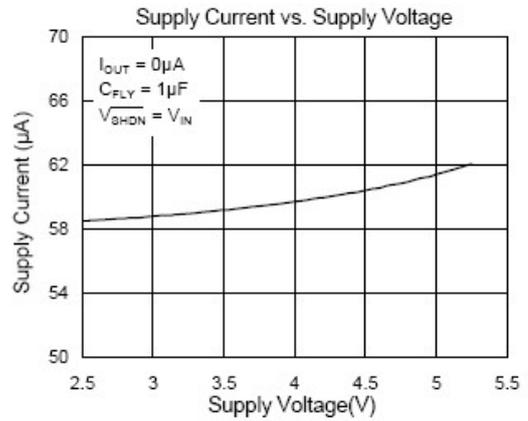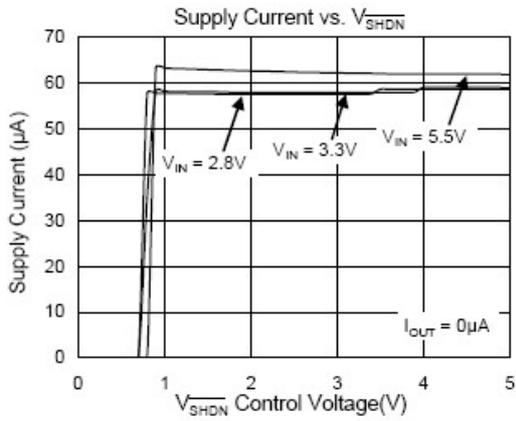


FS1310B

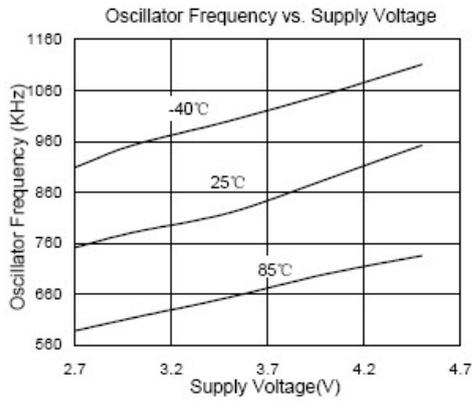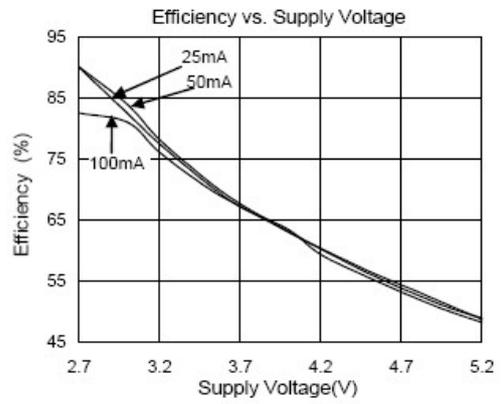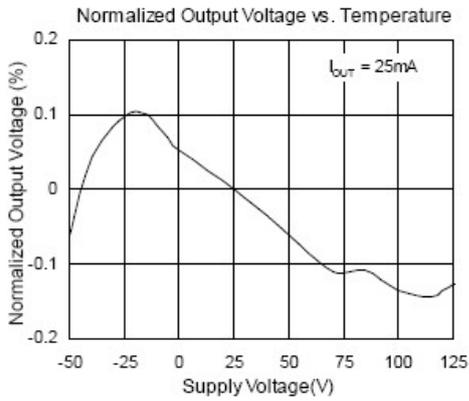

- Package Information

SOT23-6

FS1310B

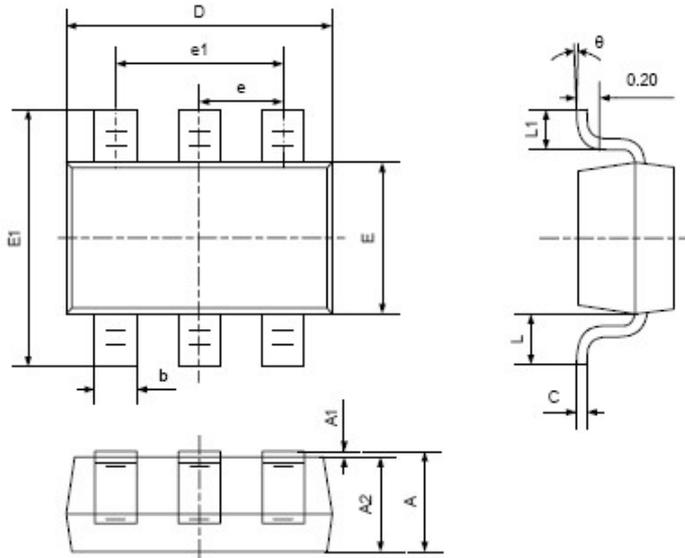

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.400	0.012	0.016
C	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.700REF		0.028REF	
L1	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°